

Finescreen 1000

Highly impact and puncture resistant, water-drainage wall system incorporating a cement board core, reinforced base coat and 100% acrylic polymer exterior finish.

System Description

Finescreen 1000 is a high-impact, water-drainage wall cladding system that incorporates a water-resistive barrier and features a cement board (ASTM C1325) core installed with a polymer-modified base coat, fiberglass reinforcing mesh, and finishes. Finescreen 1000 provides extremely high impact and puncture resistance and increased dimensional stability without sacrificing design freedom.

Design Considerations

Maximum substrate design deflection is L/360. Substrate must be level within 1/4" in 10' (6 mm in 3 m)

Locate control joints approximately every 600 ft² (56 m²) of wall surface area with maximum uncontrolled length or width of 24 lin. ft. (7 m) and a maximum uncontrolled length-to-width ratio of 2 1/2:1

Cement board must satisfy ASTM C1325 Type A Exterior, minimum 1/2"

Expansion joints are required in the system where they exist in the substrate, where the system adjoins dissimilar construction, at changes in substrates, at floor lines in multilevel wood frame construction, and where movement is anticipated

Uses


For exterior walls in new or retrofit commercial, institutional and residential construction such as hotels, hospitals, retail, schools, multi-family apartments and condominiums, and government facilities.

Material Substitution

Material substitution will adversely affect system performance and will void all warranty coverage unless approved in writing by Master Builders Solutions Wall Systems.

Warranty

Refer to the Finestone Warranty Schedule for specific information about this product/system.

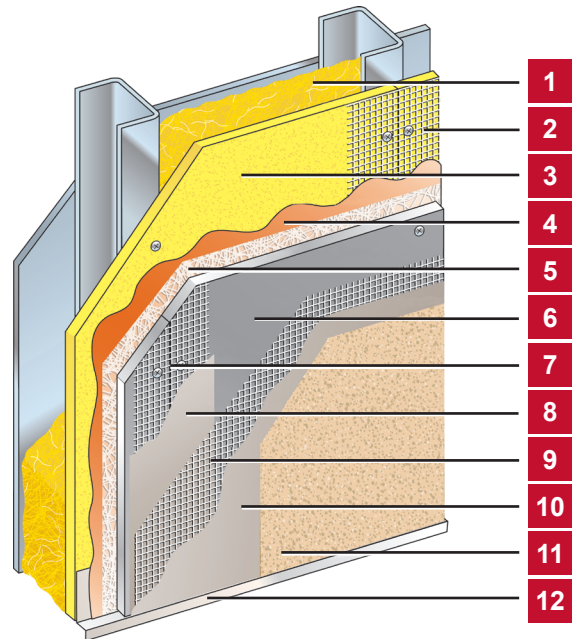

1. Cavity Insulation*
2. Approved Joint Reinforcement
3. Acceptable Sheathing*
4. Finestop RA/RS/VB
5. Drainage Mat
6. Cement Board*
7. Sheathing Joint Reinforcement
8. Finestone Base Coat
9. Finestone Reinforcing Mesh
10. Finestone Base Coat
11. Finestone Finish
12. Flashing or Starter Track*
(*By Others)

Finescreen 1000

Code Compliance			
TEST	METHOD	CRITERIA	RESULTS
Direct-Applied Exterior Finish Systems (DEFS)	ICC-ES AC59		Meets all performance requirements
Transverse Wind-load	ASTM E330	Steel stud framing (16 gauge, 3 5/8") @ 16"o.c	Average ultimate loads ¹ : - 2585 Pa (- 54 psf) + 1053 Pa (+ 22 psf) not taken to failure
Transverse Wind-load	ASTM E330	Steel stud framing (20 gauge, 3 5/8") @ 16"o.c.	Average ultimate loads ¹ : - 1676 Pa (- 35 psf) + 862 Pa (+ 18 psf) not taken to failure
Transverse Wind-load	ASTM E330	Wood assembly (2" x 4") @ 16"o.c.	Average ultimate loads ¹ : - 2681 Pa (- 56 psf) + 1197 Pa (+ 25 psf) not taken to failure
Bond Strength after Accelerated Weathering and Freeze-thaw Test	AC59	Minimum 34.3 kPa (5 psi)	Pass
Racking Test	ASTM E72	No failure of finish at substrate joints before failure of substrate OR no failure at 1" net deflection	Pass
Restrained Environmental Cycling Test	AC59	No cracking of finish or other distress after 5 cycles of water spray (24 hrs.) and radiant heat (72 hrs.)	Pass
Water Penetration	ASTM E 331	No water penetration after 15 minutes @ 137 Pa (2.86 psf)	Pass
Radiant Heat Exposure	NFPA 268	No ignition at 20 minutes	Met test criteria.
Fire Endurance	ASTM E119	Maintain fire resistance of existing rated assembly	2-hour rating
Intermediate Scale Multi-story Fire Test	NFPA 285 / UBC Standard 26-9	<ol style="list-style-type: none"> 1. Resist flame propagation over the exterior surface 2. Resist vertical spread of flame within combustible core/component of panel from one story to the next 3. Resist vertical spread of flame over the interior surface from one story to the next 4. Resist lateral spread of flame from the compartment of fire origin to adjacent spaces 	Met test criteria
Surface Burning	ASTM E84 / UL 723	Flame spread < 25 Smoke developed < 450	All components of the system meet Class A performance (FS < 25; SD < 450)
Abrasion Resistance	ASTM D968	No Cracking or loss of film integrity at 528 qt. (500L) of sand	Finish Coat not worn through after 686 liters of falling sand
Accelerated Weathering	ASTM G 153 (formerly G23)	No deleterious effects after 2000 hours.	Pass
Freeze-Thaw	AC59	No deleterious effects after 10 cycles	Pass 60 cycles
Mildew Resistance	Mil Std 810B Method 508	No fungus growth after 28 days	Pass
Salt Fog Resistance	ASTM B117	No deleterious effects after 300 hours	Pass
Water Resistance	ASTM D 2247	No deleterious effects after 14 days exposure	Pass

Finescreen 1000

Limitations

Use only for above grade vertical walls.

Warranty Statement

Master Builders Solutions warrants this product to be free from manufacturing defects and to meet the technical properties on the current Product Bulletin, if used as directed within shelf life. Satisfactory results depend not only on quality products but also upon many factors beyond our control. MASTER BUILDERS SOLUTIONS MAKES NO OTHER WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO ITS PRODUCTS. The sole and exclusive remedy of Purchaser for any claim concerning this product, including but not limited to, claims alleging breach of warranty, negligence, strict liability or otherwise, is shipment to purchaser of product equal to the amount of product that fails to meet this warranty or refund of the original purchase price of product that fails to meet this warranty, at the sole option of Master Builders Solutions. In the absence of an extended warranty issued by Master Builders Solutions, any claims concerning this product must be received in writing within one (1) year from the date of shipment and any claims not presented within that period are waived by Purchaser. MASTER BUILDERS SOLUTIONS WILL NOT BE RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL (INCLUDING LOST PROFITS) OR PUNITIVE DAMAGES OF ANY KIND.

Purchaser must determine the suitability of the products for the intended use and assumes all risks and liabilities in connection therewith. This information and all further technical advice are based on Master Builders Solutions present knowledge and experience. However, Master Builders Solutions assumes no liability for providing such information and advice including the extent to which such information and advice may relate to existing third party intellectual property rights, especially patent rights, nor shall any legal relationship be created by or arise from the provision of such information and advice. Master Builders Solutions reserves the right to make any changes according to technological progress or further developments. The Purchaser of the Product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with a full application of the product(s). Performance of the product described herein should be verified by testing and carried out by qualified experts.